

EXEL COMPOSITE ROOFTRIMS: ROFYCOM

Characteristics

Material:

- Glass fibre tubes reinforced polyester

Dimensions:

- From 40 to 150 front plate

Length:

- 3m or on demand

Composite rooftrims for a better roof sealant and finishing

Building and construction have more and more flat roofs. These are covered with roofing or a bitumen layer to ensure a sealant against water. The connection between this layer and the **side wall** is often the source for much complaints.

Today Exel ensures a perfect water tight connection between your top layer and your side wall with our ROFYCOM product range. Using this range will be your added value to finish a roofing job that stays perfect forever.

Benefits of our rooftrims:




- Ease of installation due to lightweight, and possibility to fix a membrane with fire to the trim
- Set based packaging including all connection corners and plates
- Long lifetime due to corrosion resistance and low thermal expansion of the material
- No use of extra sealant between connections do take the expansion
- Scratch free due to a full colour material
- Strong long lasting colour due to advanced resin technology
- Additional wall connection profile available for matching installation design and procedure

Composite rooftrims

41001

41005 41006 41012 41015

41008

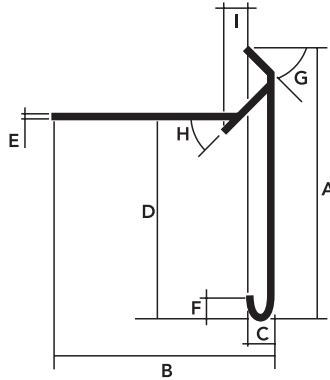


Reference	A	B	C	D	E	F	G	H	I	Mas./lgt-g/m
-----------	---	---	---	---	---	---	---	---	---	--------------

Roof trim

41.001	40	60	9	27	2	6	10°	40°	5	430±20
41.005	50	80	9	30	2	7	20°	45°	5	550±25
41.006	65	60	9	45	2	7	20°	45°	5	520±25
41.008	80	90	9	50.5	2	7	15°	45°	-	700±35
41.012	100	60	9	80	2	7	20°	45°	5	635±30
41.015	150	60	9	130	2	7	20°	45°	5	845±40

Wall connection

50.112.16.10	2,5	9,5	62	-	-	-	-	-	-	271±15
--------------	-----	-----	----	---	---	---	---	---	---	--------

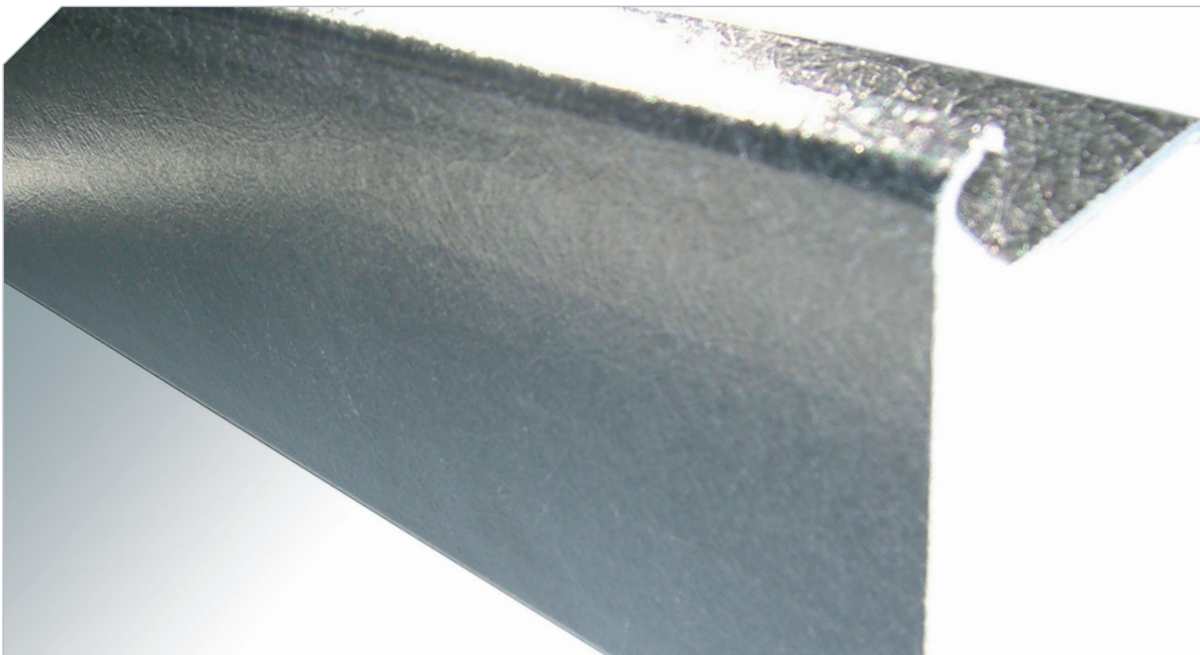

exel

EXEL Composites N.V.
 Industriepark De Bruwaan 2
 B-9700 Oudenaarde
 Belgium
 Tel. +32-55 33 30 11
 Fax. +32-55 33 30 40
www.exel.net